




Inset door handles.



Lock supplied with 6 plate lever activation system.

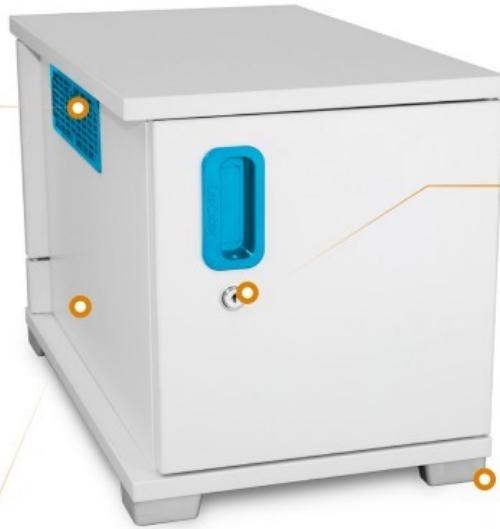

Strong MFC cladding.

Non-marking feet.



1.6mm grey steel fixed shelves with ventilations.



Well placed vents to the rear and base.

Front door opens 270 degrees.



IEC power cable into the mains.



Isolated power compartment for electrical safety.

